



How-to videos



lutron.com/CLwiring

Install with confidence

Use included diagrams or visit our website for step-by-step instructions.

Find the right LED



lutron.com/LEDfinder

DVCL-153P, DVWCL-153P, SCL-153P, DVSCCL-153P, LECL-153P, CTCL-153P

150 W LED/CFL 600 W* Incand./Halogen

DVCL-253P, DVSCCL-253P

250 W LED/CFL 600 W* Incand./Halogen

Please read before installing

Ganging and Derating

Remove side sections if mounting two or more devices side by side (see chart for new wattage rating).

* Maximum Allowable Inc./Hal. Wattage		
No sides removed	1 side removed	2 sides removed
600 W	500 W	400 W

Bend back and forth



Important Notes

- CAUTION:** Use only with permanently installed fixtures with dimmable screw-in compact fluorescent, dimmable screw-in LED, halogen, or incandescent lamps. To avoid overheating and possible damage to other equipment, do not use to control receptacles, motor-driven appliances, or transformer-supplied appliances.
- Install in accordance with all national and local electrical codes.
- When no "grounding means" exists in wallbox, the National Electrical Code (NEC) allows a control to be installed as a replacement when a plastic faceplate with plastic fasteners is used, or the circuit is protected by a ground fault circuit interrupter (GFCI). Lutron wallplates meet this requirement. Cap or remove green wire before screwing control into wallbox.
- Protect the dimmer from dust and dirt when painting or spackling the wall.
- It is normal for the dimmer to feel warm to the touch during operation.
- Clean the dimmer with a soft damp cloth only. Do not use any chemical cleaners.
- For indoor use only.

English

INSTALL WITH CONFIDENCE




lutron.com/CLwiring

WARNING: SHOCK HAZARD. May result in serious injury or death. Turn off power at circuit breaker or fuse before installing.



Single Pole


For lights switched from **one** location:

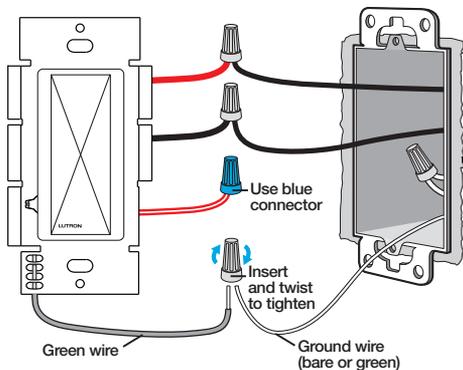

NOTE: Black and solid red wire on the dimmer are interchangeable.


3-Way

For lights switched from **two** locations:



IMPORTANT: Mark or tag the common wire before removing the old switch.

QUESTIONS? See lutron.com/CLwiring

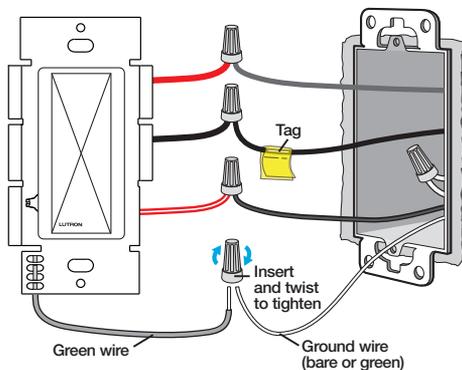


NOTE: Only one dimmer can be used in a 3-way circuit.

AFTER INSTALLATION: Adjust dimming range for LEDs and CFLs

- Turn lights ON and move slider to bottom.
- Adjust lever to improve dimming. NOTE: The Adjustment Lever on your dimmer may be in a different location than shown.
- Turn lights OFF and ON to verify proper operation.

For Troubleshooting, please visit www.lutron.com/support



Limited Warranty: www.lutron.com/TechnicalDocumentLibrary/369-119_Wallbox_Warranty.pdf ©2013-2019 Lutron Electronics Co., Inc. Lutron and LED+ are trademarks or registered trademarks of Lutron Electronics Co., Inc., in the U.S. and other countries. The YouTube icon is a trademark of Google LLC.

Receive an Extended Warranty: www.lutron.com/CLregistration

Support: 1.844.LUTRON1 (USA/Canada) +1.888.235.2910 (Mexico)